

FULLY AUTOMATED CONFERENCE CAPTURE

by multicand systems



ALL-IN-ONE HARDWARE + SOFTWARE SOLUTION

3U rackable Video Server



PTZ touret cameras

1111111111


Í







The system is connected to the audio conferencing system over IP and receive in real time the speaking information.

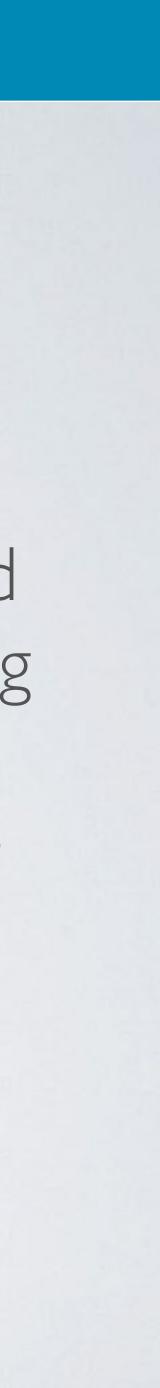


The system is integrated with major audio-conferencing manufacturers.

TAIDEN®


(Δ) audio-technica






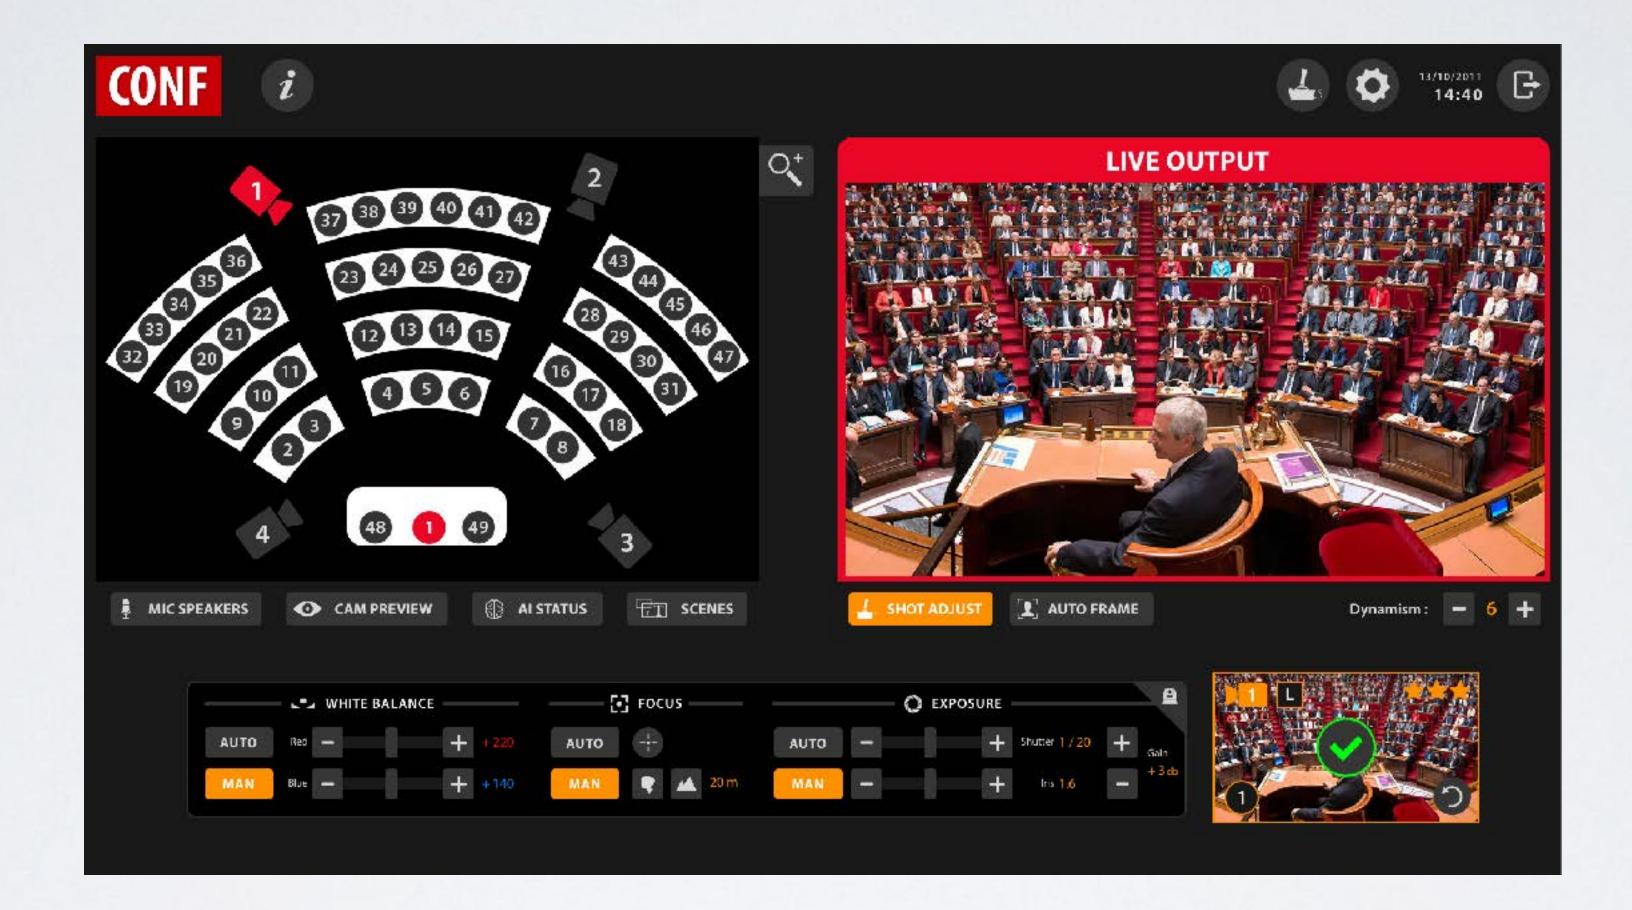

Each microphone is covered by different angles of shots with the PTZ cameras installed in the conference room.



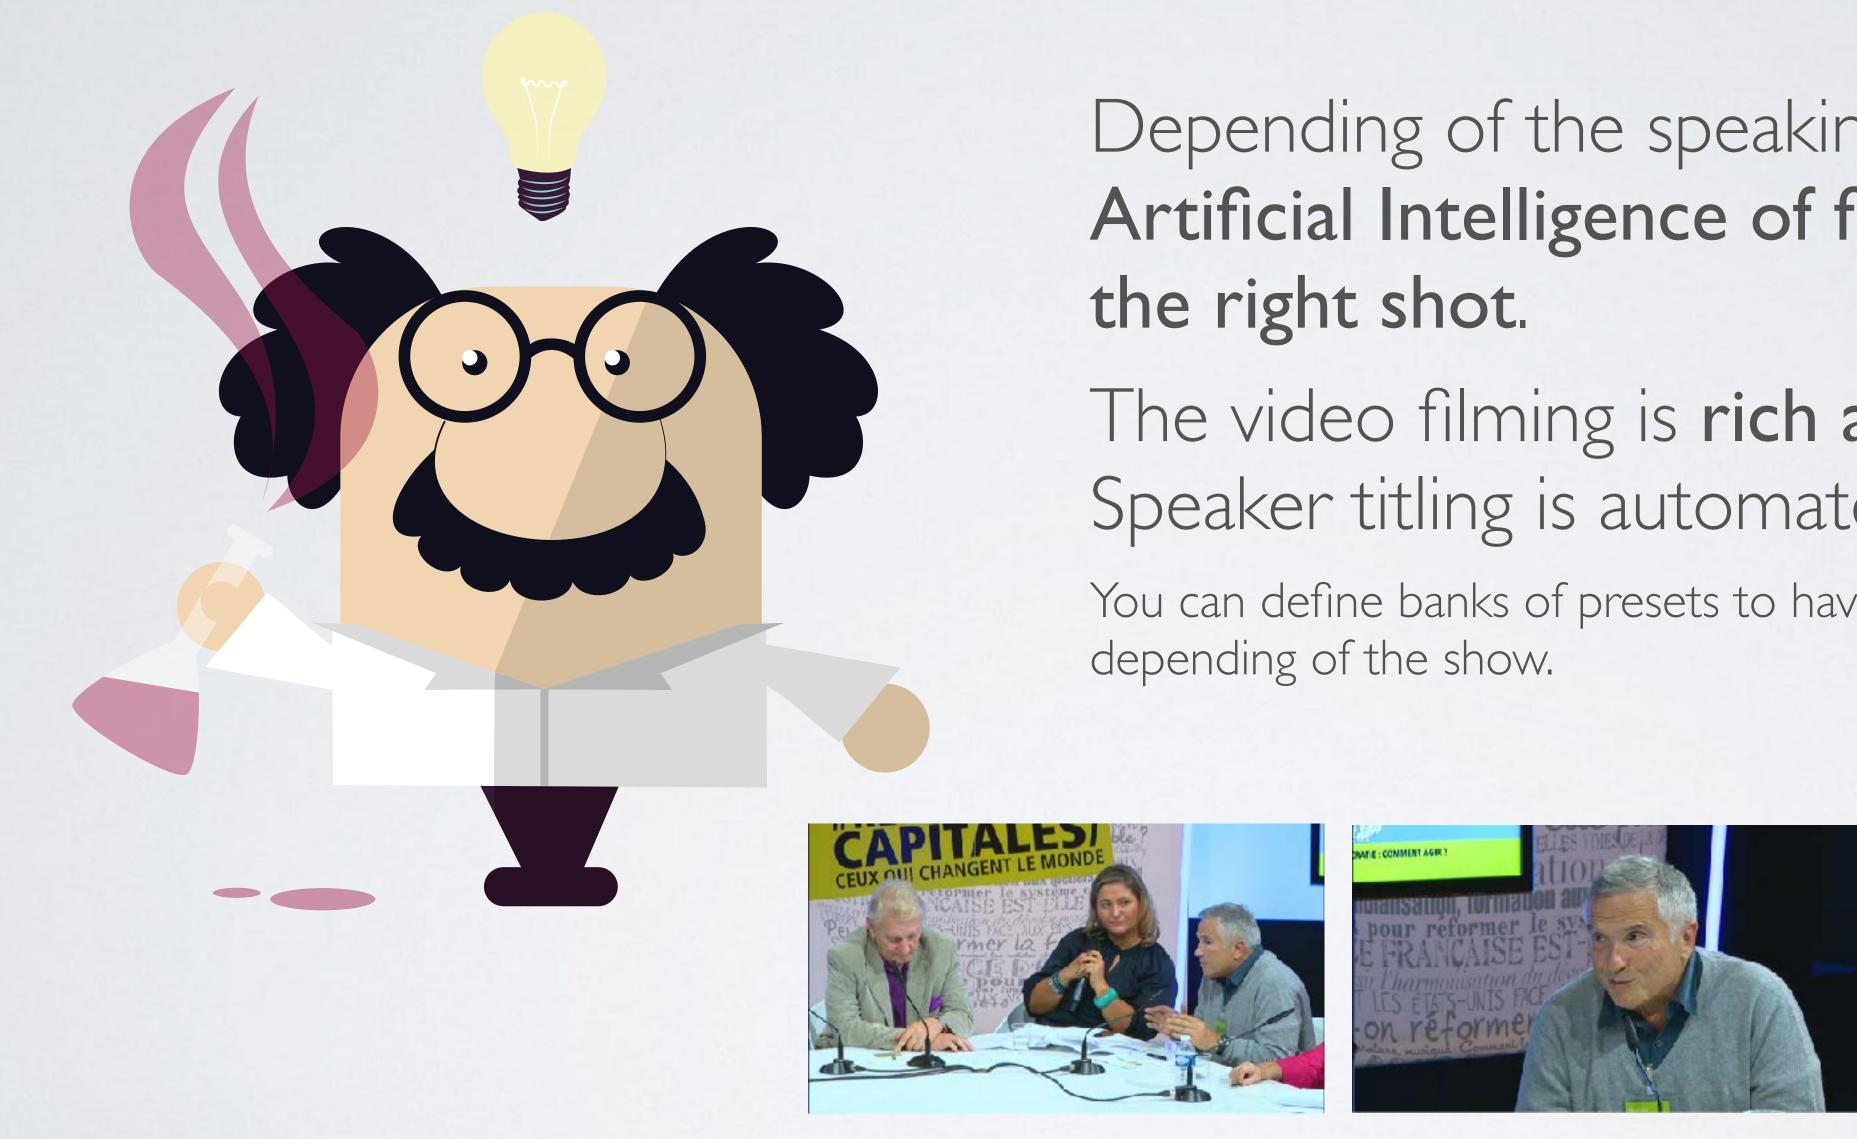

Depending of the speaking situation, the Artificial Intelligence of filming chooses

The video filming is rich and dynamic. Speaker titling is automated also.

You can define banks of presets to have a special bunch of angles






VIDEO FILMING SEMI AUTOMATED

At any time, you can take control of the speaker video coverage by clicking on a microphone.

The AI turns into pause mode and will provide the shots that match to it.

You also can adjust a shot during the live session.

That is the SEMI-AUTO mode.

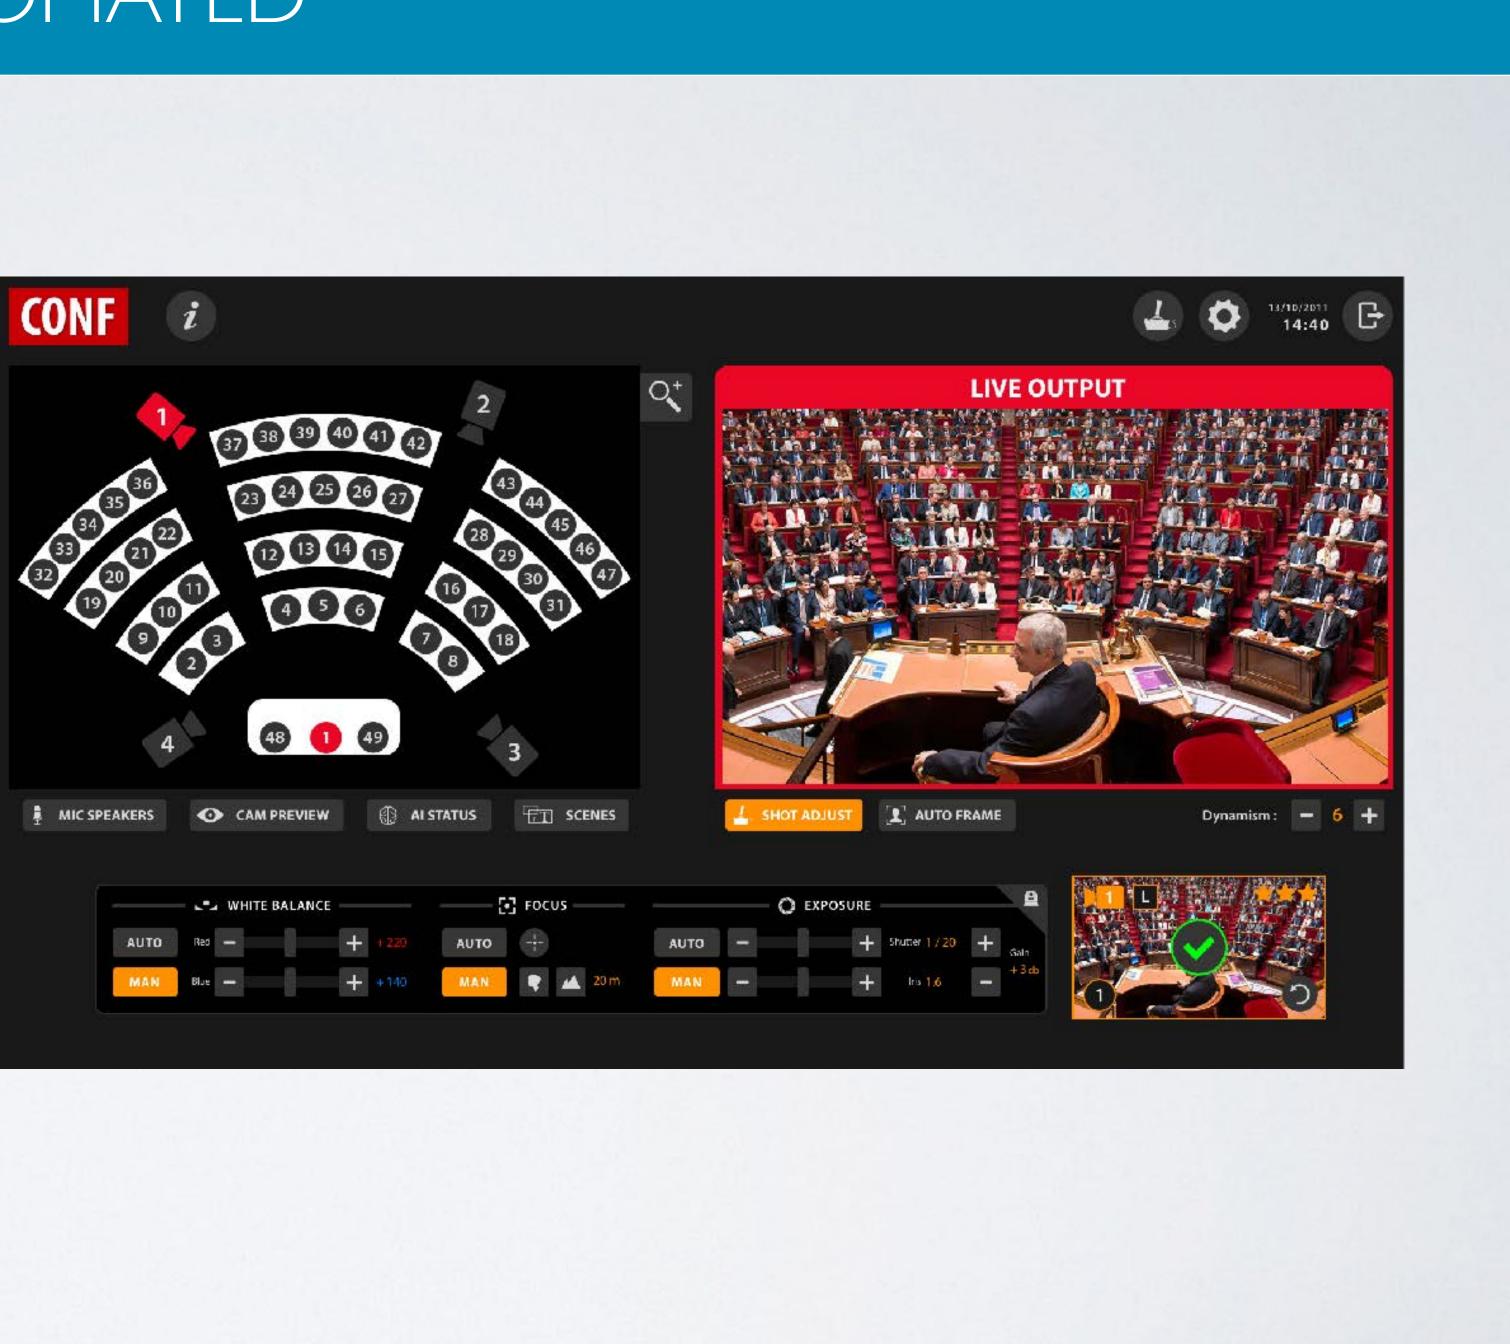

VIDEO FILMING MANUAL

With STUDIO add-on, at any time, you can switch to MANUAL mode to have a complete control of the video filming.


This is useful for musical live session or big shows with dedicated video human ressources.

An extra license of MULTICAM STUDIO is needed.






GRAPHICS AUTOMATION

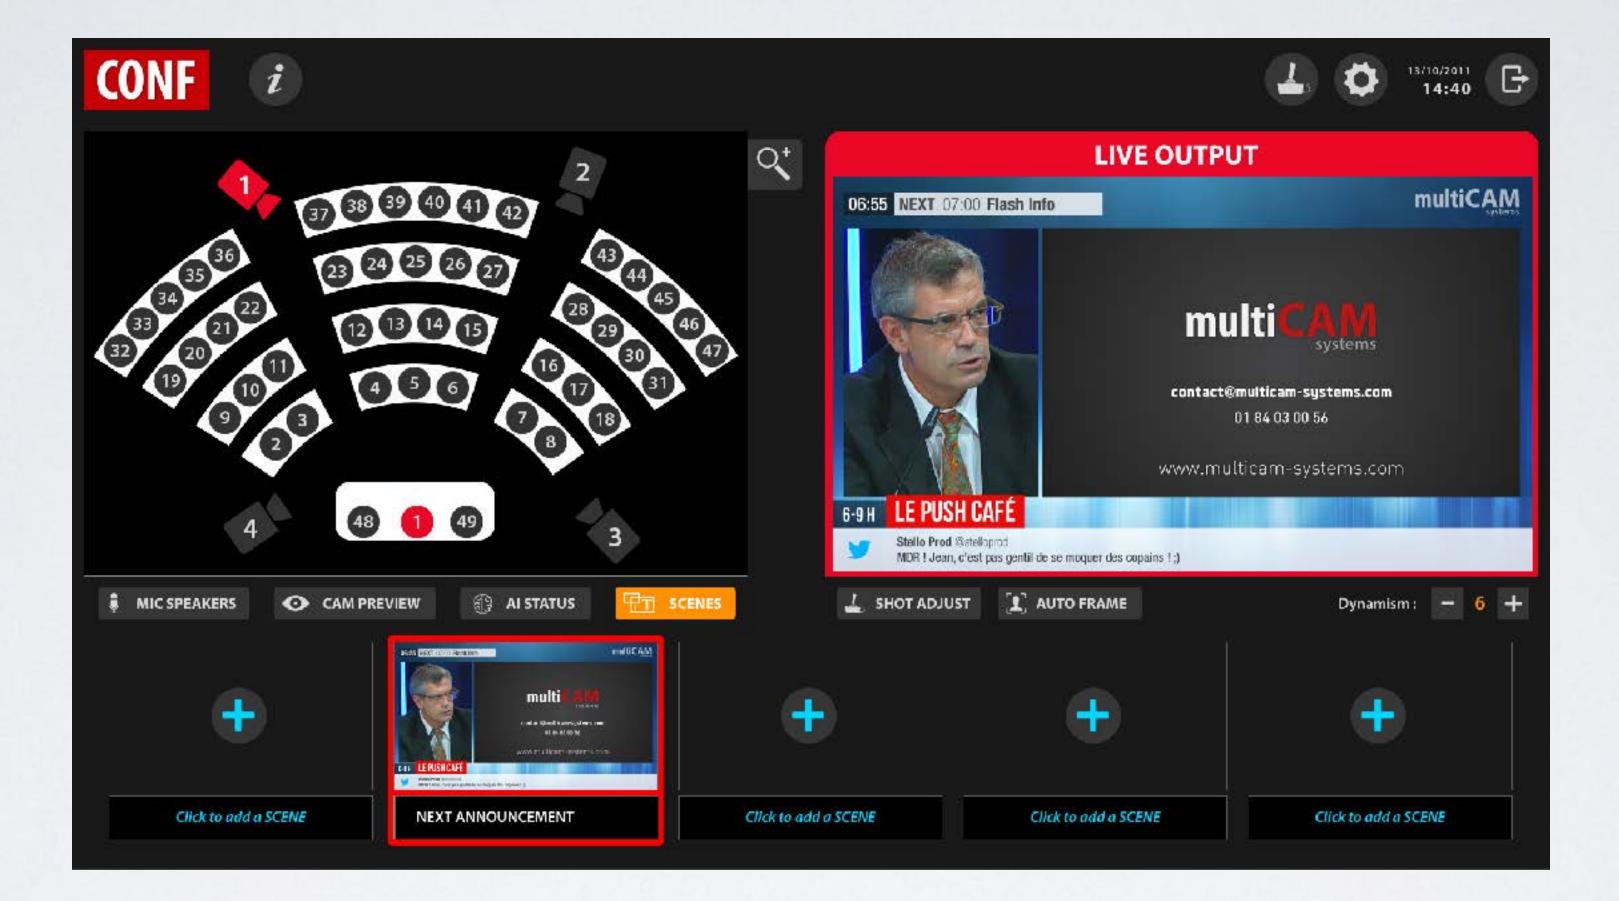

You can create your custom graphic scenes (panels, PiP, Medialist, etc...) and store to one of the 5 available slots.




RECORDING, LIVE STREAMING & PODCASTING





After live session recording, the video publication can be automated according to your specified broadcasting Workflow.




RECORDING, LIVE STREAMING & PODCASTING




Multicam Systems are compatible with the major video plateform. We are compatible with Facebook Live! It manages FTP uploading also.

2/5 TRACH	EO_20150607_1403.mp4	0	13/10/2011 14:40
			×
PODCAST			
se your Podcasting I	PLATEFORM :		
	You Tube	f	
Kältura	📒 LibCast	ρod	
COMPRESS VIDEO	360p @700kbps	estimated size : 1	25 MB
		< PREVIOUS	NEXT





EXTERNAL CONTROL OFTHE SYSTEM

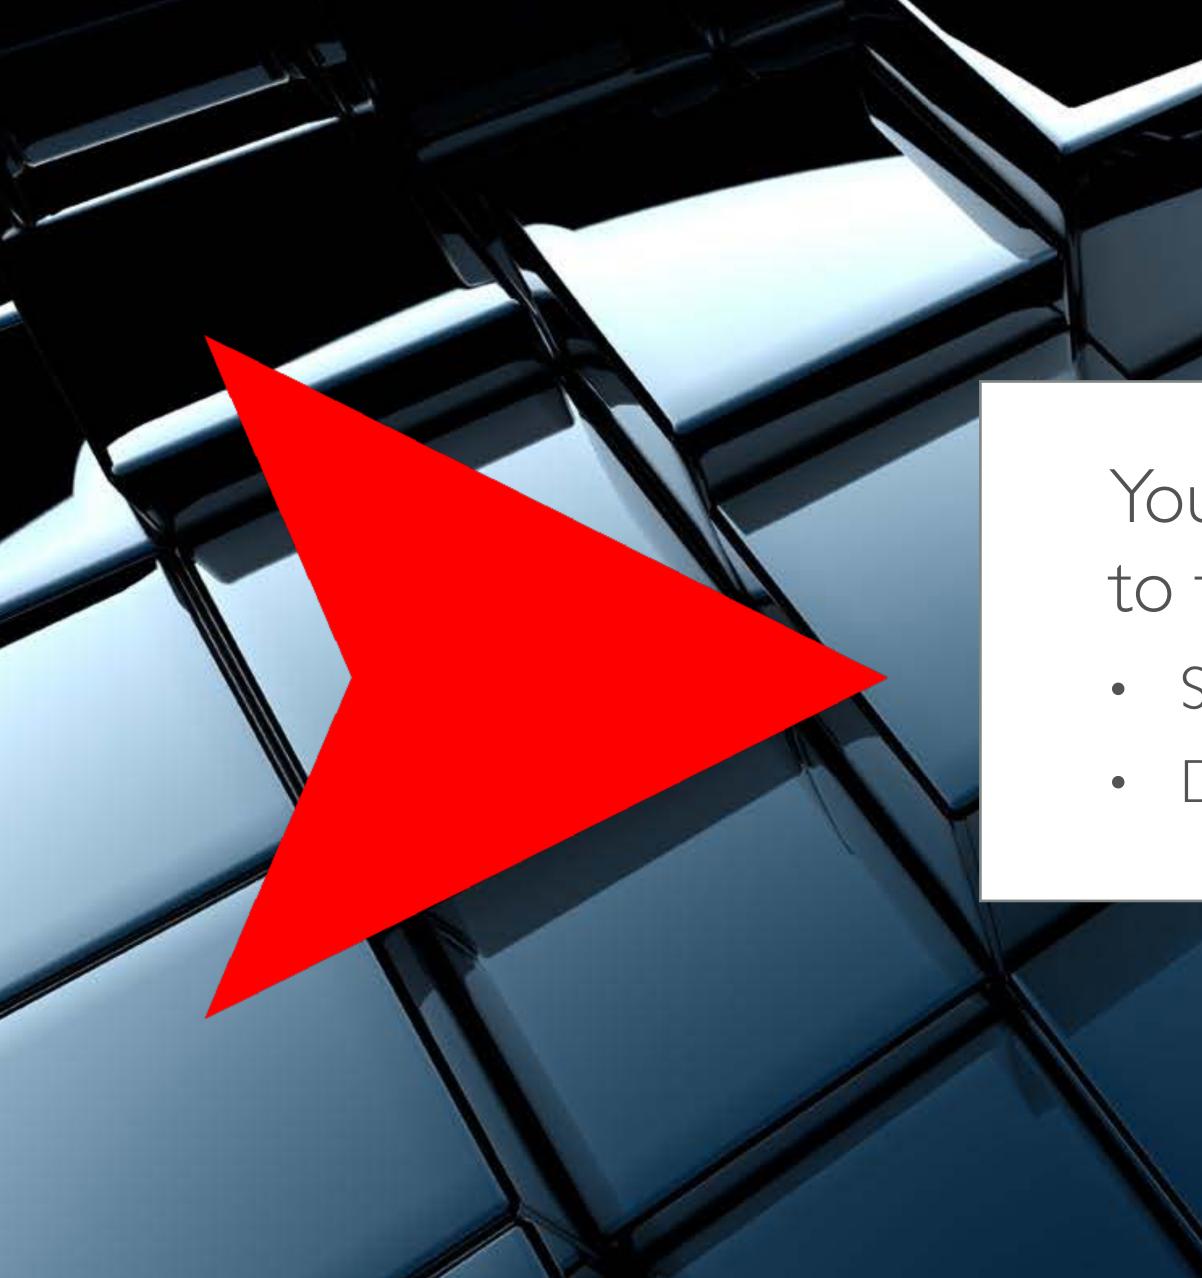

You can send commands to the system with our API : • Start/Stop recording/streaming, Display a specific scene, etc...



FLEXIBLE INTEGRATION



The standard CONF system is dedicated for 5 cameras inputs. If you need more video inputs, we recommend the use of a BlackMagic smart videoHub that can grab **up to 40 cameras**.

This external device help us also to manage multiple rooms with just one system.



MULTIPLE OUTPUTS

With this feature, it is very easy to display the live program to a set of TVs.

It also can be used to ingest the output of a Multicam system to another.

The standard CONF system has HDMI + HD-SDI outputs. You also can stream over the local ethernet IP the live output to any other computer with NDI technology.





More i www.multic



FULLY AUTOMATED CONFERENCE CAPTURE

More information :

www.multicam-systems.com